

# THE WORLD LEADER IN FUME EXTRACTION TECHNOLOGY



PrintPRC

BOFA's PrintPRO 500 iQ high end extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has now been further enhanced with the inclusion of several new features including BOFA's new iQ Operating System, making the new PrintPRO 500 iQ one of the most advanced system available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.


#### STANDARD FEATURES:

- iQ Operating System
- High airflow and pressure rates
- Reverse Flow Air technology
- DeepPleat DUO pre filter
- Combined HEPA/Gas filter incorporating ACF technology
- Filters with long life and low replacement cost
- Automatic Flow Control system
- Real time airflow reading
- Independent filter condition monitoring, display and warnings
- High contrast display
- 'Run safe' operation
- Remote diagnostics via USB

### OPTIONAL FEATURES:

- Smart Filter technology
- VOC gas sensor (Volatile Organic Compound)
- Remote stop / start interface
- Filter change / System fail signal
- Interfacing
- On-board compressor
- Optional filter media's

Mid to high end fume extraction system for wide format printers and the printing industry.

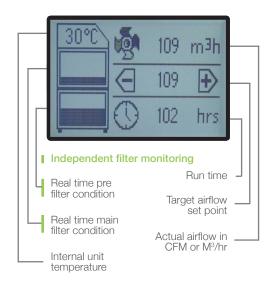



iQ Intelligent technology



DeepPleat DUO filter technology



Advanced Carbon Filter technology



Reverse Flow Air technology



Optional Smart Filter technology









Take a look at the iQ animation, which explains exactly why the BOFA iQ Operating System provides unrivalled control and data management for your fume extraction unit.

UNITS - PART NUMBERS			OPTIONS			
Model	Voltage	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitoring	On-board Compressor
PrintPRO 500 iQ Stainless Steel	230V	L4272	A2001	A2002	A2003	A2007
	115V	L4271				
PrintPRO 500 iQ Powder Coated	230V	L4262				
	115V	L4261				

REPLACEMENT FILTERS - PART NUMBERS			
Model	DeepPleat DUO Pre Filter	Combined HEPA/Gas Filter	
PrintPRO 500 iQ	A1030222	A1030304	

TECHNICAL DATA				
	230V	115V		
Dimensions (HxWxD)	1197 x 600 x 790mm	47.1 x 23.6 x 31.1"		
Cabinet Construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel		
Airflow / Pressure	550m <sup>3</sup> /hr / 100mbar	324cfm / 100mbar		
Electrical Data	230v 1ph 50/60Hz Full load current: 9.5 amps / 1.1kw	115v 60/50Hz Full load current: 14.8 amps / 1.1kw		
Noise Level	< 63dBA*	< 63dBA*		
Weight	135kgs	298lbs		
Approvals	CE	CE		

DEEPPLEAT DUO PRE FILTER SPECIFICATIONS		
Surface Media Area	30m² approx	
Filter Media	Glass Fibre	
Filter Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec mild steel	
Filter Efficiency	F8 (95% @ 0.9 microns)	

COMBINED HEPA/GAS FILTER SPECIFICATIONS		
Surface Media Area	7.5m <sup>2</sup> approx	
HEPA Filter Media	Glass Fibre	
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec Mild Steel	
Treated Activated Carbon	34kgs	
Filter Efficiency	99.997% @ 0.3 microns	

## AIRFLOW THROUGH FILTERS



Chemical Filter



HEPA Filter



Pre Filter




Clean Air




Contaminated Air Particulate

Medium sized particulate held in the filter media Velocity drops through expansion Large particulate settles to the

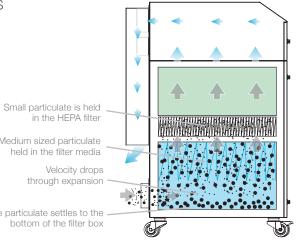

#### TECHNICAL SPECIFICATION

- 1 iQ Display
- 2 On / Off Switch
- 3 Power Cable
- 4 Signal / Interface Cable
- 5 Castors
- 6 Door Hinge
- 7 Hose Inlet Connection 125mm
- 8 Exhaust Outlet
- 9 Motor Cooling Inlet
- 10 Door Latch
- 11 Motor Cooling Outlet
- 12 Standby Button

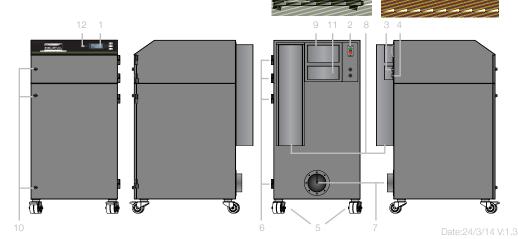





Tel: +44 (0) 1202 699 444 Fax: +44 (0) 1202 699 446 Email: sales@bofa.co.uk Web: www.bofa.co.uk











